




MODEL 01-39C Semi-Frameless Continuous Hinge Door with In-Line Panel


MAXIMUM ALLOWABLE WIDTH OF UNIT = $12''$	
MAXIMUM ALLOWABLE HEIGHT OF UNIT = $84''$	REV DATE:
FRAME: EXTRUDED ALUMINUM SHALL 6463-T6 ALLOY PER ASTM B 221	Ø40CT2Ø24
HARDWARE: ALUMINUM, STAINLESS STEEL, OR OTHER CORROSION RESISTANT MATERIALS	
FINISH SPECIFICATIONS: ANODIZED OR POWDER COATED	REFERENCE:
GLAZING POLYCARBONATES: CLEAR ACRYLIC	INSTALLATION
STANDARD HANDLE: ALUMINUM, CLAMP-ON	DETAIL
GLASS THICKNESS: 1/4" TEMPERED	



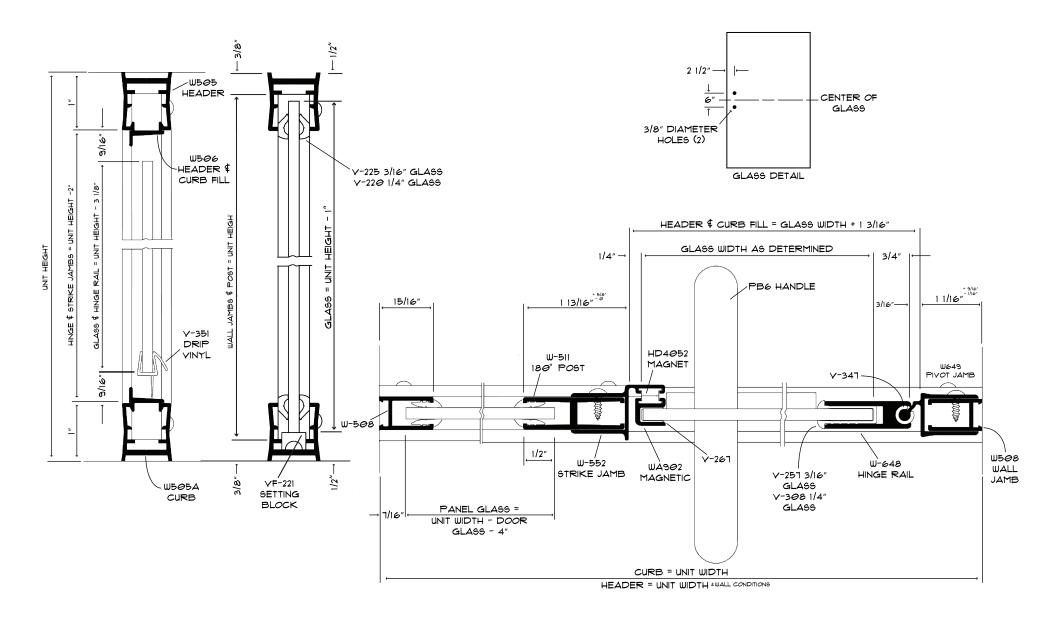

MODEL 01-39D Semi-Frameless Continuous Hinge Door with In-Line Panel

MAXIMUM ALLOWABLE WIDTH OF UNIT = $12''$	
MAXIMUM ALLOWABLE HEIGHT OF UNIT = 84"	REY DATE:
FRAME: EXTRUDED ALUMINUM SHALL 6463-T6 ALLOY PER ASTM B 221	285EPT2024
HARDWARE: ALUMINUM, STAINLESS STEEL, OR OTHER CORROSION RESISTANT MATERIALS	
FINISH SPECIFICATIONS: ANODIZED OR POWDER COATED	REFERENCE:
GLAZING POLYCARBONATES: CLEAR ACRYLIC	INSTALLATION
STANDARD HANDLE: 6" TUBULAR, MOUNTED THROUGH THE GLASS	DETAIL
GLASS THICKNESS: 1/4" TEMPERED	

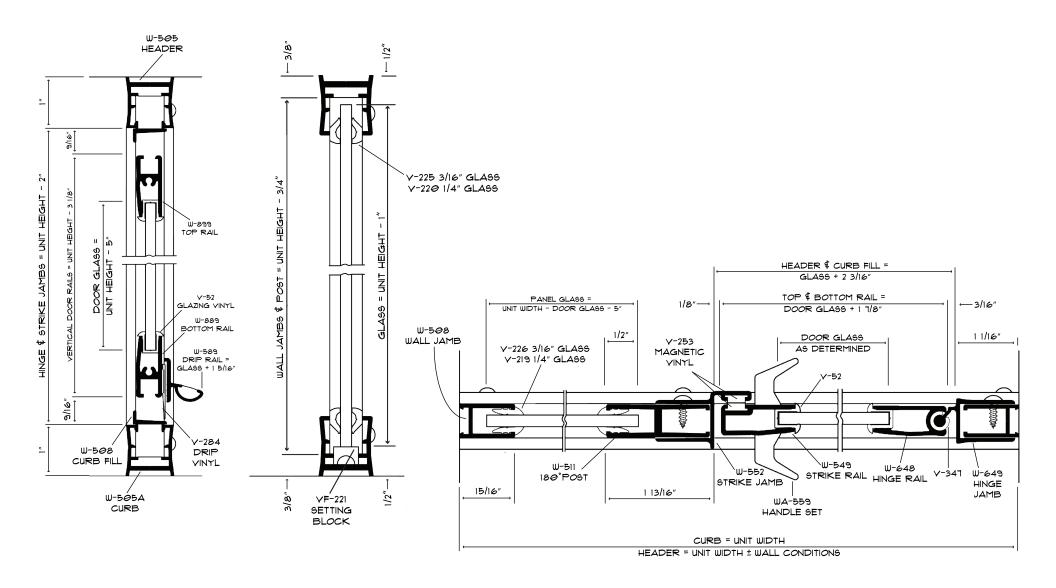



MODEL 01-79C Framed Continuous Hinge Door with In-Line Panel

REV DATE: FRAME: EXTRUDED ALUMINUM SHALL 6463-T6 ALLOY PER ASTM B 221 Ø50CT2Ø24 HARDWARE: ALUMINUM, STAINLESS STEEL, OR OTHER CORROSION RESISTANT MATERIALS FINISH SPECIFICATIONS: ANODIZED OR POWDER COATED GLAZING POLYCARBONATES: CLEAR ACRYLIC INSTALLATION STANDARD HANDLE: ALUMINUM, CLAMP-ON GLASS THICKNESS: 1/4" TEMPERED

REFERENCE:

DETAIL